

## VT-C25-IPC



# VT-C25-IPC

## IP Dome Camera

The VT-C25-IPC is the perfect solution for various kinds of vehicles, including bus, coach, tipper, van, road sweeper, fuel tanker... The vehicle-mounted CCTV cameras enable drivers and operator to check anytime what happen inside of the vehicle by delivering a live feed on the monitor of everything in the camera view. Moreover, fitted with Infra-Red LEDs for improved night vision and combined with a robust, durable casing, the operation system offers unrivalled performance and clarity.

### Key features:



5-8m IR



IP Rating



Anti-vibration



12 VDC  
~48VDC

- ✓ 1920x1080@30fps or 1280x960@30fps resolution
- ✓ Built-in power loss protection
- ✓ Supports three streams
- ✓ Perfect solutions for vehicles monitoring, bus, coach, tipper, van, road sweeper, fuel tanker
- ✓ Mirror and normal image switch available




**t** +44 (0) 1246 225 745

**e** info@visiontrack.com

**w** visiontrack.com



**s** support.visiontrack.com

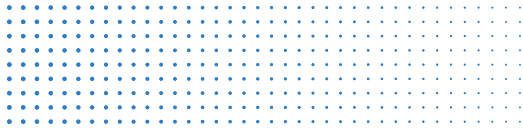

# VT-C25-IPC

## Specifications:

<b>Product</b>	VT-C25-IPC Camera	VT-C25-IPC Camera
<b>Sensor</b>	1/2.9" 2M Pixel CMOS	1/2.9" 2M Pixel CMOS
<b>Resolution</b>	1920(H)x1080(V)	1920(H)x1080(V)
<b>Minimum illumination</b>	0.1Lux (Colour Illumination), F12	0.1Lux (Colour Illumination), F12
<b>Electronic shutter</b>	1/30 Second-1/10000 Second	1/30 Second-1/10000 Second
<b>Black-light compensation</b>	Supported	
<b>S/N</b>	≥45dB	≥48dB
<b>IR distance</b>	5-8m	5-8m
<b>Lens</b>	2.6mm, 2.8mm, 4mm, M12 Fixed aperture F1.8	2.6mm, 2.8mm, 4mm, M12 Fixed aperture F1.8
<b>FOV</b>	2.6mm = H x V 116 x 61° 2.8mm = H x V 104 x 55° 4mm = H x V 78 x 42°	2.6mm = H x V 104 x 78° 2.8mm = H x V 90 x 69° 4mm = H x V 71 x 53°
<b>Video compression standard</b>	H.264, H.265	
<b>Compression output rate</b>	512Kbps-8Mbps	512Kbps-6Mbps
<b>Image resolution</b>	Main stream: 1080P (720P optional) @ 30fps Sub Stream1:VGA/WDI/D1/QVGA/CIF @30FPS ADPCM, G.711A, G.711U, G.726	Main stream: 1080P (720P optional) @ 30fps
<b>CBR/VBR</b>	Support	
<b>Audio compression standard</b>	ADPCM, G.711A, G.711U, G.726	
<b>Network port</b>	10M/100M adaptive Ethernet port	
<b>Network protocol</b>	TCP/IP, HTTP, DHCP, RTSP, NTP, FTP	
<b>N9M</b>	Supported	
<b>ONVIF</b>	Supported	
<b>Client preview</b>	Built-in WEB server; Support IE browser	
<b>Installation features</b>	Installs on the roof or wall of the vehicle	
<b>Temperature</b>	-40°C + 70°C	
<b>Humidity</b>	0% - 90%	
<b>Power supply</b>	DC 12V(PON)/POE(802.3af)	
<b>Waterproof class</b>	IP66(Without audio)	
<b>Power consumption</b>	POE<3w(day)<3.5w(night) PON<2w(day)<3.5w(night)	
<b>Dimension (mm)</b>	101.5mm (L) x 96mm (W) x 52.6mm (H)	

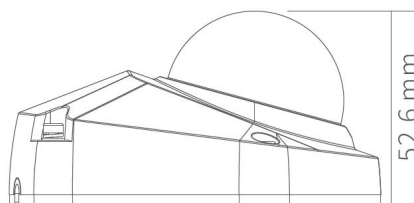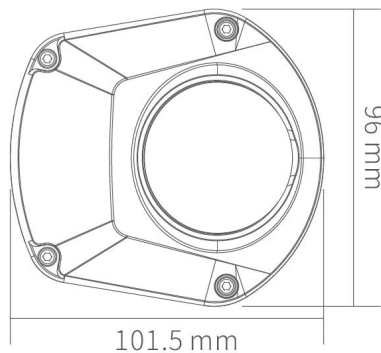

**t** +44 (0) 1246 225 745  
**e** info@visiontrack.com  
**w** visiontrack.com  
**s** support.visiontrack.com



**VisionTrack Copyright © 2021 - All Rights Reserved.**  
 All manufacturers specifications are subject to change without notice. No liability will be accepted by VisionTrack for any errors or omissions in this information.