

VT-C30



VT-C30

1080P MINI FORWARD-FACING CAMERA

Full 1080P Forward-facing camera in a secure metal housing.

Key features:

- Metal-cased mini housing with megapixel fixed lens
- Low power consumption
- Wide dynamic range
- High-sensitivity, Starlight



Operation Procedures:

1. Remove the lens cap (1).
2. Tear off 3M glue from covering layer, fix the camera on the right location.
3. Connect the camera to 4-pin DIN jack as diagram below.
4. Adjust camera position by loosening the fixed screw (4).
Adjust the focus sharpness of the lens (2) by loosening the focus-lock screw (3).
5. Re-tighten the all fixed screws.




t +44 (0) 1246 225 745

e info@visiontrack.com

w visiontrack.com

s support.visiontrack.com

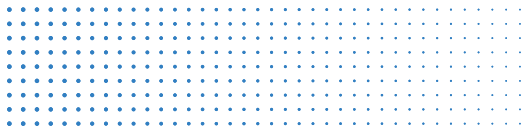


VT-C30

Specifications:

Image Sensor	1/2.8" IMX 307
TV System	PAL/NTSC (optional)
Picture Elements	1920 (H) x 1080 (V)
Sensitivity	0.01 Lux/F1.2
Scanning System	Progressive scan RGB CMOS
Synchronization	Internal
Auto Gain Control (AGC)	Auto
Electronic Shutter	Auto
BLC	Auto
Infrared Spectrum	N/A
Infrared LED	N/A
Video Output	1 Vpp, 75Ω, AHD
Audio Output	N/A
Mirror	Optional
Noise Reduction	3D
Lens	f2.1mm Megapixel
HFOV	136 ± 5 degree
DFOV	158 ± 5 degree
Power Supply	12V DC±10%
Power Consumption	130mA (Max)
Dimensions	66 (L) x 51 (W) x 50 (H) mm
Net Weight	108g
Weatherproof/Water Proof	N/A
Operating Temperature	-30° C ~ +70 ° C

Dimensions:

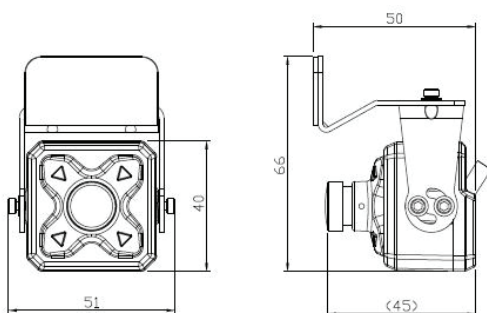

t +44 (0) 1246 225 745

e info@visiontrack.com

w visiontrack.com

s support.visiontrack.com