

VT-C20-IPC




VT-C20-IPC

NETWORK IP CAMERA

The **VT-C20-IPC** is a full HD 1080p compact, lightweight intelligent IP vehicle camera that is mounted directly on the windshield to avoid any reflections and light interference from inside the vehicle. Delivering optimum image quality, this forward-facing camera also features digital WDR.

Key features:

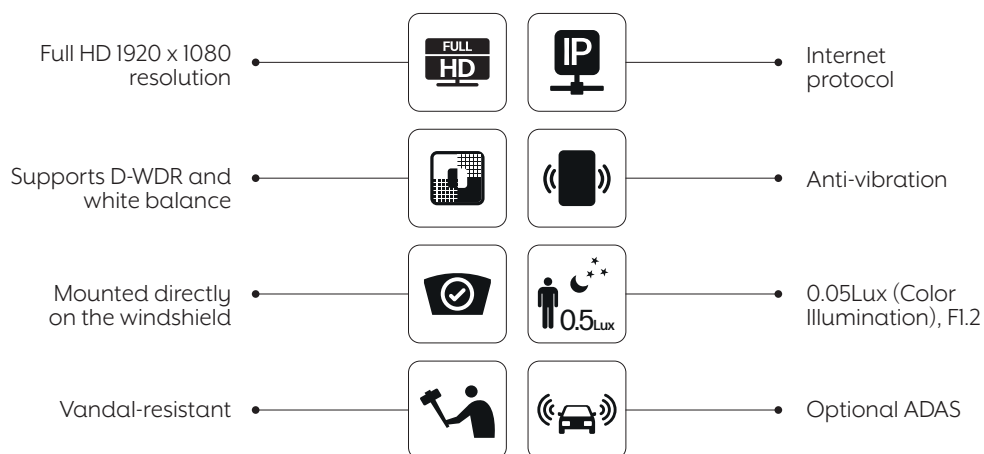


t 1-888-969-6203

e info.us@visiontrack.com

w visiontrack.com/us

s orders.us@visiontrack.com

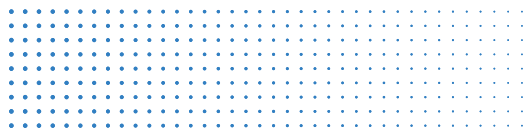

VT-C20-IPC

Specifications:

| | |
|-----------------------------------|---|
| Sensor | 2 MP 1/2.8" CMOS |
| Resolution | 1920 (H) x 1080 (V) |
| Minimum Illumination | 0.05Lux (Color Illumination), F1.2 |
| Electronic Shutter | 1/30 Second - 1/10000 Second |
| Wide Dynamic Range | ≥80db |
| Black-light Compensation | Supports |
| S/N | ≥48db |
| FOV | 100° |
| Video Compression Standard | H.264 Auto |
| Compression Output Rate | 512Kbps-8Mbps |
| Image Resolution | Main Stream: 1080P(720P) @ 30fps Sub Stream1: VGA/WD1/D1/QVGA/CIF @ 30FPS Net transmission stream: dynamic (adjustable) |
| CBR/VBR | Supports |
| Audio Compression Standard | ADPCM, G.711A, G.711U, G.726 |
| Audio Input | Built-in car-level audio pickup |
| Network port | 10M/100M adaptive Ethernet port |
| Network Protocol | TCP/IP, HTTP, DHCP, RTSP, NTP, FTP |
| N9M | Supports |
| ONVIF | Supports |
| Client Preview | Autonomise/Ceiba |
| Installation features | Stick directly to the front windshield (Glass slope is 19° to 90°) |
| Temperature | -104°F + 158°F (-40°C + 70°C) |
| Power Supply | DC 12V(PON) |
| Power Consumption | <2.5w |
| Dimension (mm) | 4.7" x 3" x 1.53" (121.6mm(L) x 75mm(W) x 39mm(H)) |

t 1-888-969-6203

e info.us@visiontrack.com

w visiontrack.com/us

s orders.us@visiontrack.com