

VT-C6



VT-C6

HD DRIVER-FACING IR CAMERA

Compact AHD 720p internal driver-facing camera that can be easily fitted anywhere in a vehicle.

Key features:




IR Night Vision



Full HD



Digital WDR



CMOS

- ✓ 1/3" 1.3-megapixel CMOS
- ✓ 1280 x 720 resolution
- ✓ Digital WDR
- ✓ IR distance of 10ft (internal)
- ✓ 6 x IR LEDs
- ✓ 0Lux when IR on
- ✓ 0.1" (2.3mm lens)
- ✓ Easy installation
- ✓ 2.7" x 2.3" x 2"
(70(L) x 60(W) x 40(H)mm)




t 1-888-969-6203

e info.us@visiontrack.com

w visiontrack.com/us

s orders.us@visiontrack.com

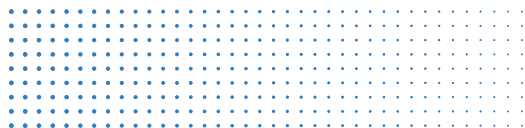

VT-C6

Specifications:

Sensor	1/3" 1.3M pixel CMOS Sensor
Electronic Shutter	1/30 Second -1/10000 Second
Lens	0.1" (2.3mm lens)
Lens Type	M12
Minimum Illumination	0Lux@F1.2 (IR on)
Wide Dynamic Range	Digital WDR, 80db
Resolution	720P
Black-light Compensation	Supports
S/N	≥50db
Day/Night IR-Cut	10ft (3m (6 pieces of LED with IR))
Audio	Supports
Synchronisation System	Internal synchronisation
Scanning System	2:1 interlaced scanning
Gamma Correction	0.45
Image Setting	Brightness, Chroma, Contrast, Saturation and Sharpness
Video Coding	H.264 Baseline Profile/H.265 Main Profile Baseline
Video Compression Bit Rate	Video: 500Kbps~6Mbps
Audio Compression Standard	G.711ALAW, G.711ULAW, ADPCM
Image Resolution	Main Stream: 720P @ 30fps (Max.)
	720P @ 20fps @ 1843kbps (Default)
	Sub-stream: D1 @ 30fps (Max.)
	VGA @ 15fps @ 1536kbps (Default)
CBR/VBR	Supports, VBR is default
Audio Input	Supports
Power Supply	12V DC±10%
Power	1.6W (IR on)
Working Temperature	-86°F~+158°F (-30°C~+70°C)
Storage Temperature	-104°F~+185°F (-40°C~+85°C)
Humidity	0% - 95%

t 1-888-969-6203

e info.us@visiontrack.com

w visiontrack.com/us

s orders.us@visiontrack.com