

VT670-FHD-IPC




VT670-FHD-IPC

NUMBER PLATE CAMERA

Water-resistant with an IP69K rating, the **VT670-FHD-IPC** works as a rear-view camera. It has a super-wide viewing angle, is durable in all weather conditions and mounts perfectly on all license plates.

Key features:

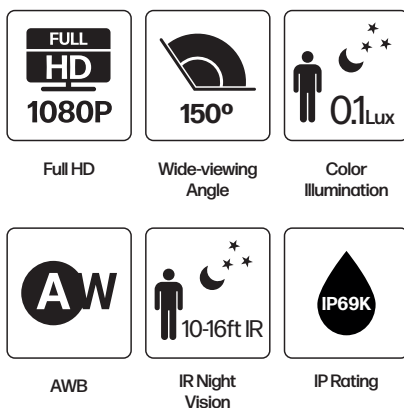

- ✓ Resolution: FHD 1080P
- ✓ 150° FOV
- ✓ Minimum illumination: 0.1Lux (Colour illumination)
- ✓ 0Lux (IR on)
- ✓ Automatic electronic shutter, AWB
- ✓ IR distance: 10-16ft
- ✓ IP69K



t 1-888-969-6203

e info.us@visiontrack.com

w visiontrack.com/us


s orders.us@visiontrack.com



VisionTrack Inc Copyright © 2021 - All Rights Reserved.

All manufacturers specifications are subject to change without notice.

No liability will be accepted by VisionTrack for any errors or omissions in this information.

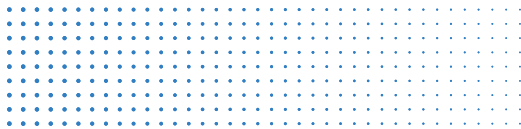


VT670-FHD-IPC


Specifications:

Sensor	1/2.9" 2.0M Pixel CMOS
Resolution	FHD 1080P
Minimum illumination	0.1Lux (Colour Illumination), 0Lux (IR on)
Electronic shutter	1/30s-1/10000s
ICR	ICR Infrared filter
Adjustable angle	Horizontal up 30°, Horizontal down 45°
BLC	Supports
S/N	≥48db
DNR	3D DNR
IR	3-5m
Lens	150°
Video compression standard	H.264
Compression output rate	32Kbps-6Mbps
Resolution	Main Stream: 1080P@15fps / 720P@25fps Sub Stream: VGA/D1/CIF@15FPS Network Stream: CIF@10FPS (Adaptive)
Network interface	10M/100M adaptive Ethernet port (6PIN aviation) Compatible with T3000/VT5500-G/VT6.2 and VT8000 models
Operation temperature	-40°C +70°C
Operation humidity	0% - 95%
Power supply	PON (DC12V ±10%) Powered from VT3000/VT5500-G/VT6.2 and VT8000 (PON Required) models
Consumption (Max.)	VT5500-G/VT6.2/VT3000/VT8000
IP Rate	IP69K
Dimension	7.7" x 1.16" x 1.18" (196.7mmx29.5mmx30mm) (LxWxH)
Net Weight	200g

Dimensions:

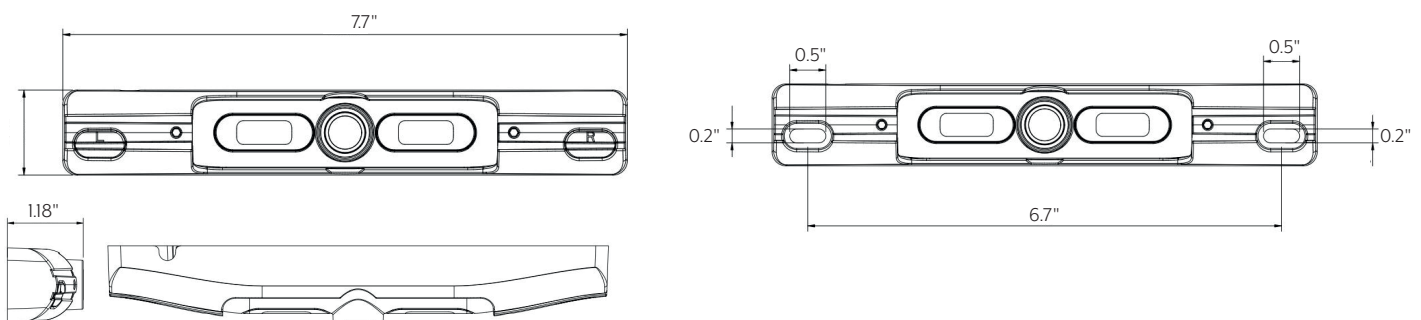

Video output:

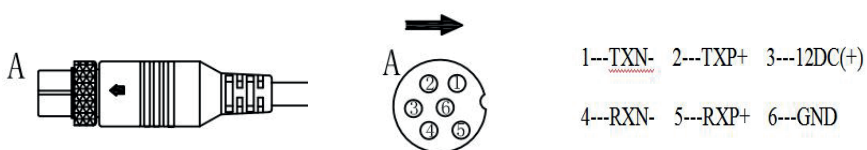

t 1-888-969-6203

e info.us@visiontrack.com

w visiontrack.com/us

s orders.us@visiontrack.com