

VT-C20-IPC











VT-C20-IPC

NETWORK IP CAMERA

The **VT-C20-IPC** is a full HD 1080p compact, lightweight intelligent IP vehicle camera that is mounted directly on the windscreen to avoid any reflections and light interference from inside the vehicle. Delivering optimum image quality, this forward-facing camera also features digital WDR.




Key features:

- Full HD 1920 x 1080 resolution 
- Supports D-WDR and white balance 
- Mounted directly on the windscreen 
- Vandal-resistant 
- Internet protocol 
- Anti-vibration 
- 0.05Lux (Colour Illumination), F1.2 
- Optional ADAS 



t +44 (0) 1246 225 745
e info@visiontrack.com
w visiontrack.com
s support.visiontrack.com

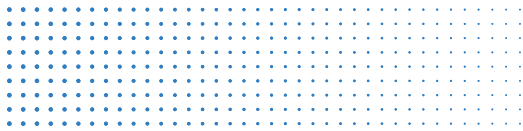

VT-C20-IPC

Specifications:

Sensor	2 MP 1/2.8" CMOS
Resolution	1920 (H) x 1080 (V)
Minimum Illumination	0.05Lux (Color Illumination), F1.2
Electronic Shutter	1/30 Second - 1/10000 Second
Wide Dynamic Range	≥80db
Black-light Compensation	Supports
S/N	≥48db
Lens	2.6mm, 2.8mm, 4mm, M12 Fixed aperture F1.8
FOV (2.8mm)	H*V 96*55°
FOV (4mm)	H*V 73*41°
FOV (8mm)	H*V 36*20°
Video Compression Standard	H.264 Auto
Compression Output Rate	512Kbps-8Mbps
Image Resolution	Main Stream: 1080P(720P) @ 30fps Sub Stream1: VGA/WD1/D1/QVGA/CIF @ 30FPS Net transmission stream: dynamic (adjustable)
CBR/VBR	Supports
Audio Compression Standard	ADPCM, G.711A, G.711U, G.726
Audio Input	Built-in car-level audio pickup
Network port	10M/100M adaptive Ethernet port
Network Protocol	TCP/IP, HTTP, DHCP, RTSP, NTP, FTP
N9M	Supports
ONVIF	Supports
Client Preview	Built-in WEB server; Support IE browser
Installation features	Stick directly to the front windshield (Glass slope is 19° to 90°)
Temperature	-40°C + 70°C
Power Supply	DC 12V(PON)
Power Consumption	<2.5w
Dimension (mm)	121.6mm(L) x 75mm(W) x 39mm(H)

t +44 (0) 1246 225 745

e info@visiontrack.com

w visiontrack.com

s support.visiontrack.com