

## VT-CP4







# VT-CP4

## IN-VEHICLE TOUCH SCREEN MONITOR

The **VT-CP4** is a touchscreen display suitable for mounting on a vehicle dashboard. With its large 7-inch screen, this monitor is ideal for all commercial vehicles. It operates and integrates with a mobile DVR. When the driver reverses the vehicle, the monitor switches automatically from normal recording to the live reversing view.


### Key features:

			
Screen Size	Built-in Speaker	Touch Screen	Resolution

- ✓ 7" touchscreen display
- ✓ 800 x 480p resolution
- ✓ RFID Swipe Card Module (13.56 MHz for driver to sign in and sign off)
- ✓ Connects to Visiontrack MDVR
- ✓ Yellow-4PIN aviation-din connector
- ✓ Connects to reversing camera
- ✓ Operating Voltage 12V
- ✓ Waterproof and Dustproof IP53



**t** +44 (0) 1246 225 745  
**e** info@visiontrack.com  
**w** visiontrack.com  
**s** support.visiontrack.com

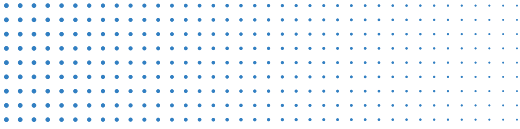

## VT-CP4

### Specifications:

<b>Specifications of Screen:</b>	Size	7" touch screen display
	Resolution	800x480
	Aspect ratio	16:9
	Button and Screen Distribution	Combined
<b>Material:</b>	Panel Material	70%PC+30%ABS Engineering plastics
	Button Material	Silicone
<b>Built-in Module:</b>	RFID Swipe Card Module	13.56 MHZ for driver to sign in and sign off
<b>Interface:</b>	Speaker	Speaker(16Ω, 2W)x2
	MDVR Interface	Connects to Visiontrack MDVR
	CAM Interface	Yellow-4PIN aviation-din connector, connects to reversing camera
	MIC Interface	Connects to the driver loud hailer
<b>Button:</b>	SENSOR Interface	Reversing signal detection port, to monitor and control for reversing.
	Function Buttons	Restate / Station Announcer / Arrow Keys / Confirmation / Exit
	Number Buttons	0-9
<b>Interface:</b>	MIC	1 (External/Internal)
	Tile Installation	Refer to mounting bracket
<b>Dimensions:</b>	Bracket Installation	There are three brackets with hood
	185mm×128mm×34.9mm	
<b>Operation Parameters:</b>	Operating Voltage	12V
	Operating Current	200mA
	Total Power Consumption	2.4W
<b>Performance Parameters:</b>	Waterproof and Dustproof	IP53
	Operating Temperature	-20°C~+70°C
	Relative Humidity	8%~90%



Back



Front



Side

**t** +44 (0) 1246 225 745  
**e** info@visiontrack.com  
**w** visiontrack.com  
**s** support.visiontrack.com