

# **OVISIONTRACK**

### **VT2000**



# **VT2000**

ň

PANIC




#### FORWARD-FACING VEHICLE CCTV

**OVISIONTRACK** 

The **VT2000** is a full HD 1080p connected vehicle telematics camera, featuring instant remote Cloud upload, live view snapshots, health-checking, built-in GPS/GLONASS and G-shock sensor, designed to deliver high-quality videos of incidents instantly to our data platform.

#### Key features:

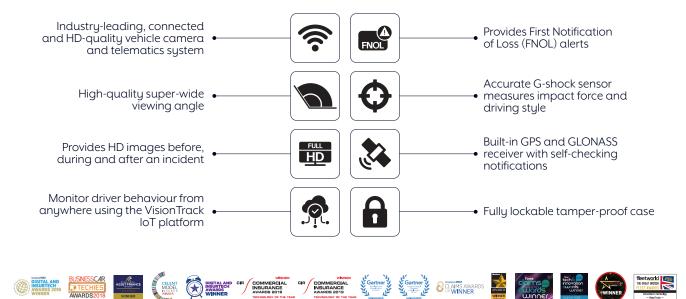

t +44 (0) 1246 225 745
e info@visiontrack.com
w visiontrack.com
s support.visiontrack.com

### 

VisionTrack Copyright © 2020 - All Rights Reserved. All manufacturers specifications are subject to change without notice. No liability will be accepted by VisionTrack for any errors or omissions in this information.



**OVISIONTRACK** 

## VT2000

#### **Specifications:**

| Image sensor            | 1/3" 3-megapixel CMOS sensor                                |
|-------------------------|---|
| DSP                     | Standard DSP  |
| Angle of view           | 170° (H: 139.5, V: 71.5, +5%)                               |
| Band support            | WCDMA Band1 (2,100MHz)/ Band8 (900MHz)                      |
| Max data rate           | UL: 5.76Mbps, DL: 7.2Mbps                                   |
| Video resolution        | 1080P HD (1920x1080) 720P (1280x720), VGA (640x480)         |
| Recording speed         | Up to 30 fps  |
| Recording mode          | Continuous , Event, Dual-mode                               |
|                         | Supports cards (Class 10) up to 128GB (codec encrypted)     |
| Memory                  | Cloud Storage – Microsoft Azure - ISO 27001, HIPAA,         |
|                         | FedRAMP, SOC 1 and SOC 2 accredited                         |
| GPS/GLONASS             | Internal GPS /GLONASS                                       |
| G-sensor                | Internal 3-axis G-sensor                                    |
| Gyro                    | 3-axis (X,Y,Z), output rate: 100 Hz,                        |
| RTC                     | Internal battery  |
| Speaker                 | Recording start, error                                      |
| Alarm In/Out            | 2 x Alarm In, 1 x Alarm Out                                 |
| LED                     | Record (Blue LED), Communication (Red LED)                  |
| Super capacitor         | Enable recording of last file and shut down                 |
| Power input             | 12V to 24V DC permanent wiring kit input voltage: DC 5V, 3A |
| Delayed power shut down | Supports delayed power shutdown                             |
| Power consumption       | 15W   |
| Size / weight           | 91mm x 56mm x 56mm (w/o bracket) , 150g                     |
| Operation temp.         | -10C°~55C°  |
|                         |   |

t +44 (0) 1246 225 745
e info@visiontrack.com
w visiontrack.com
s support.visiontrack.com



VisionTrack Copyright © 2020 - All Rights Reserved. All manufacturers specifications are subject to change without notice. No liability will be accepted by VisionTrack for any errors or omissions in this information.