


VT-FORS GOLD PANEL VAN

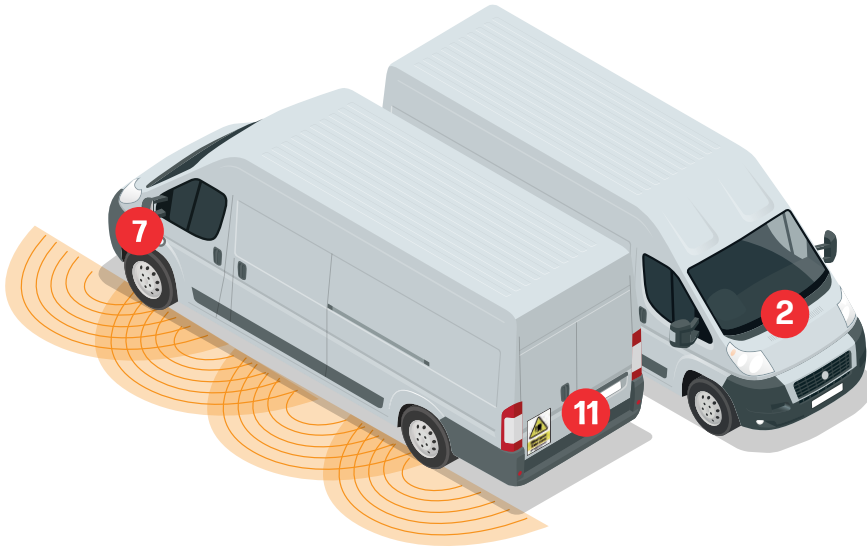

VT-FORS GOLD PANEL VAN

Bespoke kit designed specifically for panel vans.

This kit includes the following:

- 1. VT5500-G-1TB**
5CH MDVR
Includes 1TB Hard-drive



- 2. VT-C20-MINI****
Forward-facing Camera



- 3. VT-LT ALERT**
Left-turn Alert



- 4. VT-CAN-M8***
Side Scan Interface
(Vehicle 2012 or newer)



- 5. VT-WNREVERSINGALARM****
White Noise
Reversing Alarm



- 6. VT-TIMER CUT OUT**
Timer cut-out button



- 7. VT-MM-AHD (Kit)**
3CH AHD Monitor
Includes 5M Cable, F2F
Convertor, Brackets



- 8. VT408-AHD**
HD Side-View Camera



- 9. VT408 Spacer 50mm x2**
VT408 Spacer 25mm x2



- 10. VT-SIDE SCAN**
VT-Sensor Brain (No Sensors)
VT-Sensor Display + Mixture of x4 sensors



- 11. VT670-FHD*****
Rear-view Camera



- 12. VT-C5M x3**
VT-C15M x1
5 & 15 Metre Cables



- 13. VT-WARNING STICKER**
BLIND SPOT
Vehicle Signage




Product specifications can be found on the next page of this documents. *additional charge may be involved. **Not required for FORS but VisionTrack recommend. ***FORS recommend for 7.5 tonne vehicles, VisionTrack recommend for 3.5 and 7.5 tonne.

t +44 (0) 1246 225 745

e info@visiontrack.com

w visiontrack.com

s support.visiontrack.com



VT-FORS GOLD PANEL VAN

VT5500-G

- Supports 4 channels AHD (1080P) +1 channel IPC (1080P)
- Supports hard disk for main recording
- Alarm integration for central monitoring
- Supports GPS, Wi-Fi and 3G/4G
- Built-in three-axis inertial sensor
- Vibration-resistant design



VT-LT ALERT

- Dual Voltage
- CE and EMC approved
- M.I.R.A. - tested for all on-and-off highway applications
- Epoxy sealed for greater durability against water
- Complete with anti-vibration gasket and mounting screws
- IOR approved - IOR-037568



VT-TIMER CUT OUT

- Six minute timer cut-out
- Auto Reset
- 12-14V
- IP67 rated - sealed against mud, water and vibration
- 30(H) x 88(W) x 47(D) mm



VT408-AHD

- DC 12V-24V
- 120°
- 62(L) x 44(H) x 62(W) (mm)
- -20°C + 70°C
- 1280 x 720 pixels



VT-SIDE SCAN

- 4 sensors mixed sensors (Flush/Non-Flush)
- PCB built into sensors
- Splash-proof ECU
- Digital distance display with buzzer
- DSM scanning technology
- Dual voltage



VT-WARNING STICKER BLIND SPOT



VT-C20-MINI

- 1/2.8" SONY 2.13-megapixel
- 1920 x 1080 resolution
- 0.05 Lux/F1.2 (Auto Gain on)
- 3.6mm
- DC 12V±10%
- 90(L) x 46(H) x 70(W)mm



VT-WNREVERSINGALARM

- Epoxy-sealed for greater durability
- Minimum 85 dB output
- M.I.R.A. tested for all on and off-road applications
- Pressure washable – IP67
- 2 Wire



VT-MM-AHD (Kit)

- 7-inch digital screen
- 1280x720 resolution
- Remote control + keystone
- Three video inputs, AV2/AV3 with trigger wire
- 248(L) x 106(H) x 27(D) (mm)



VT408 Spacer 50mm

- 65(L) x 50(H) x 55(W) (mm)



VT408 Spacer 25mm

- 65(L) x 25(H) x 55(W) (mm)



VT670-AHD

- DC 12V
- 150°
- 198(L) x 28(H) x 27(D) (mm)
- Temp: -20°C + 70°C
- 640 x 480 Pixels



For more information please go to
www.visiontrack.com



t +44 (0) 1246 225 745
e info@visiontrack.com
w visiontrack.com
s support.visiontrack.com



VisionTrack Copyright © 2020 - All Rights Reserved.
All manufacturers specifications are subject to change without notice. No liability will be accepted by VisionTrack for any errors or omissions in this information.