


VT-FORS SILVER ARTIC

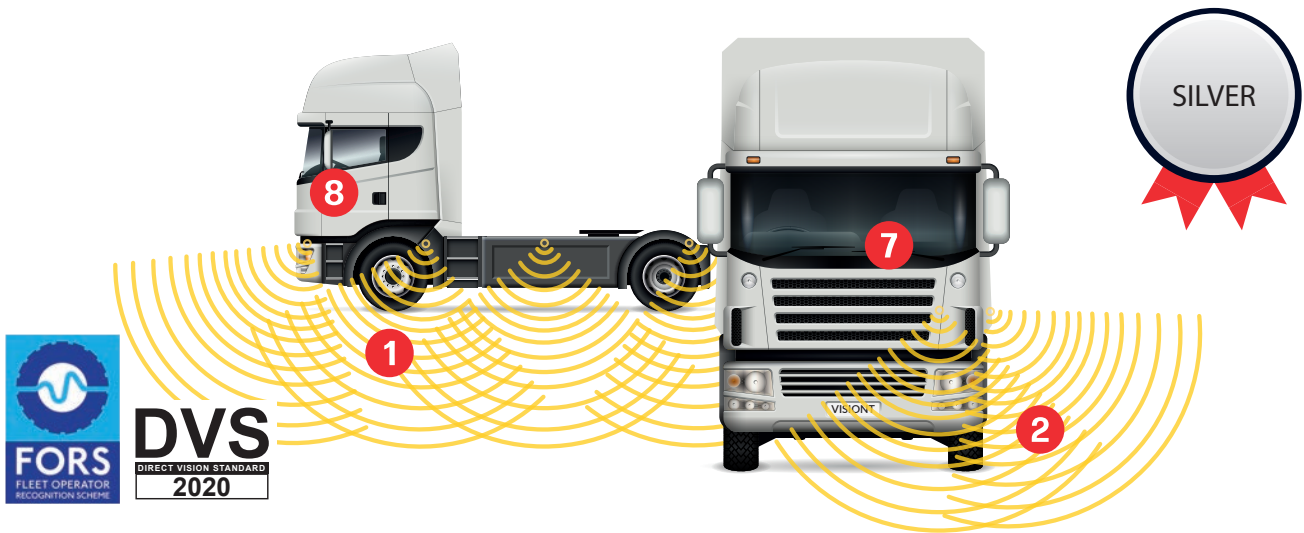

VT-FORS SILVER ARTIC

Bespoke kit designed specifically for artic vehicle types

This kit includes the following:

1. VT-SIDE SCAN

VT-Sensor Brain (No Sensors)
VT-Sensor Display + Mixture of x4 sensors



2. VT-CORNER SCAN

VT-Sensor Brain (No Sensors)
VT-Sensor Display + 4 x flush sensors



3. VT-LT ALERT

Left-turn Alert



4. VT-CAN-M8*

Side Scan Interface
(Vehicle 2012 or newer)



5. VT-WNREVERSINGALARM

White Noise
Reversing Alarm



6. VT-TIMER CUT OUT

Timer cut-out button



7. VT-M4-7-AHD (Kit)

4CH AHD Monitor
Includes 5M Cable, F2F
Convertor, Brackets



8. VT408-AHD

HD Side-View Camera



9. VT408 Spacer 50mm x1 VT408 Spacer 25mm x1



10. VT646-AHD**

Rear-view Camera



11. VT-C10M

10 Metre Cable



12. VT-WARNING STICKER BLIND SPOT Vehicle Signage



Product specifications can be found on the next page of this documents.

* additional charge may be involved.


**Not required for FORS but VisionTrack recommend.

t +44 (0) 1246 225 745

e info@visiontrack.com

w visiontrack.com

s support.visiontrack.com



VT-FORS SILVER ARTIC

VT-SIDE SCAN

- 4 sensors mixed sensors (Flush/Non-Flush)
- PCB built into sensors
- Splash-proof ECU
- Digital distance display with buzzer
- DSM scanning technology
- Dual voltage



VT-CORNER SCAN

- 4 Flush sensors installed using holes
- PCB built into sensors
- Splash-proof ECU
- Digital distance display with buzzer
- DSM scanning technology
- Dual voltage



VT-LT ALERT

- Dual voltage 12-24 volts
- Bracket Mounted (2 Bolt Fixing)
- M.I.R.A. tested for all on and off road applications
- CE and emc marked
- Epoxy sealed for greater durability against water and vibration
- Pressure washable – IP67



VT-WNREVERSINGALARM

- Epoxy-sealed for greater durability
- Minimum 85 dB output
- M.I.R.A. tested for all on and off-road applications
- Pressure washable – IP67
- 2 Wire



VT-TIMER CUT OUT

- Six minute timer cut-out
- Auto Reset
- 12-14V
- IP67 rated - sealed against mud, water and vibration
- 30(H) x 88(W) x 47(D) mm



VT-M4-7-AHD (Kit)

- 10.1-inch digital screen
- Resolution 1024 x 600p
- 4 video inputs and 4 trigger wires
- Power voltage of DC10V-36V
- 352(L) x 166(W) x 32(D) mm



VT408-AHD

- DC 12V-24V
- 120° wide-viewing angle
- 62(L) x 44(H) x 62(W) (mm)
- -20°C + 70°C
- 1280 x 720 pixels



VT646-AHD

- 1/3" colour lens
- 1280 x 720 resolution
- 120° wide-viewing angle
- IR night vision
- 50(L) x 50(H) x 80(W)mm



VT408 Spacer 50mm

- 65(L) x 50(H) x 55(W) (mm)



VT408 Spacer 25mm

- 65(L) x 25(H) x 55(W) (mm)



VT-WARNING STICKER BLIND SPOT



For more information please go to www.visiontrack.com

t +44 (0) 1246 225 745

e info@visiontrack.com

w visiontrack.com

s support.visiontrack.com