

## VT-M2-12.3-AHD



# VT-M2-12.3-AHD

## TWO-CHANNEL AHD MONITOR

The **VT-M2-12.3-AHD** is a 12.3-inch colour monitor that can be used as an in-cab driving aid that provides a better view around the vehicle and supports safer manoeuvring. This monitor is compatible with the HD dual-lens side-view camera (VT-Dual Side Camera-AHD).


### Key features:

Screen Size	2 Channel	Analogue High-Definition	DC12V - 36V

- ✓ Resolution: 1920 x 720 (AHD 720p)
- ✓ Inputs: 2
- ✓ Alarm triggers to trigger channels: Yes 2
- ✓ Button lock and blank screen until trigger supported: Yes
- ✓ Power: DC12V - 36V
- ✓ Dimensions: 335(L) x 145(W) x 38(H)mm



**t** +44 (0) 1246 225 745  
**e** info@visiontrack.com  
**w** visiontrack.com  
**s** support.visiontrack.com

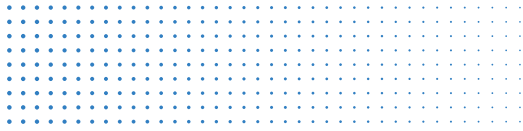

## VT-M2-12.3-AHD

### Specifications:

<b>Screen Size</b>	12.3" (8:3) IPS
<b>Resolution</b>	1920RGB(H) x RGB x 720(V)
<b>Brightness</b>	850cd/m <sup>2</sup>
<b>Contrast</b>	800:1
<b>Viewable Area</b>	292.032(H) x 109.512(V)mm
<b>View Angle</b>	Option 1: Horizontal angle: 90°, 135° (Diagonal Angle: 120°, 165°) Option 2: Horizontal angle: 90°, 150° (Diagonal Angle: 120°, 180°)
<b>System</b>	NTSPC/PAL
<b>Video Inputs</b>	3-way video inputs, 2-way trigger wires
<b>Voltage</b>	DC14~32V (With undervoltage, over voltage, overload, short circuit, reverse protection)
<b>Working Temperature</b>	-20°C ~ +70°C, Maximum humidity 95%
<b>Storage Temperature</b>	-30°C ~ +80°C, Maximum humidity 95%
<b>Storage</b>	Max. support for SD card 256GB video recording
<b>Video Input</b>	Two-way video inputs, one-way trigger wire
<b>Video</b>	Supports CVBS/AHD720P/960P/1080P/Mix
<b>Display Mode</b>	Built-in 12 multi-screen combination display modes, wich can be set as the default boot screen to meet the special needs of different users (four-way mode)
<b>Image Control</b>	Each channel mirror/normal; Brightness etc.
<b>Function</b>	Video files can be played back online or backed up to a computer
<b>Record</b>	Loop video, auto overwrite, important video files can be set lock protection, locked files will not be overwritten or deleted.
<b>Optional</b>	Four-way video optional
<b>Operation Mode</b>	6 key remote control/keystroke
<b>Connector</b>	Aviation
<b>Dimensions</b>	335(L) x 145(W) x 38(T)

**t** +44 (0) 1246 225 745

**e** info@visiontrack.com

**w** visiontrack.com

**s** support.visiontrack.com